

(51) Int. Cl.⁶: **G01G 19/393, G01G 19/42**

(22) Date of filing : 23.08.94


- (30) Priority : 24.08.93 JP 232324/93
- (43) Date of publication of application :
01.03.95 Bulletin 95/09
- (84) Designated Contracting States :
DE FR GB IT
- (71) Applicant : ISHIDA CO., Ltd.
44, Sanno-cho,
Shogoin,
Sakyo-ku
Kyoto-shi, Kyoto 606 (JP)

- (72) Inventor : Tatsuoka, Masahiko, c/o Ishida Co., Ltd.
Shiga Integrated Facility,
959-1 Simomagari
Ritto-cho, Kurita-gun, Shiga 520-30 (JP)
Inventor : Komatsu, Toshiyuki, c/o Ishida Co., Ltd.
Shiga Integrated Facility,
959-1 Simomagari
Ritto-cho, Kurita-gun, Shiga 520-30 (JP)**
- (74) Representative : Skone James, Robert Edmund
GILL JENNINGS & EVERY
Broadgate House
7 Eldon Street
London EC2M 7LH (GB)**

(54) **Combinational weighing or counting method and apparatus.**

(57) A combinational weighing or counting apparatus designed to increase the probability of selection of combinations. This combinational weighing or counting apparatus includes a plurality of weighing hoppers (6_i), and a plurality of driving feeders (3_i) for supplying articles (M) from an upstream side towards the corresponding weighing hoppers (6_i) when the driving feeders (3_i) are driven. In this combinational weighing or counting apparatus, the value at which the probability of occurrence of the combinational calculated weight or count, attains a maximum value is chosen to be greater than the target combined weight T_{M_b} , but falling within an allowance of an lower limit T_{MIN} to an upper limit T_{MAX} of the target combined weight T_M .

Fig.2

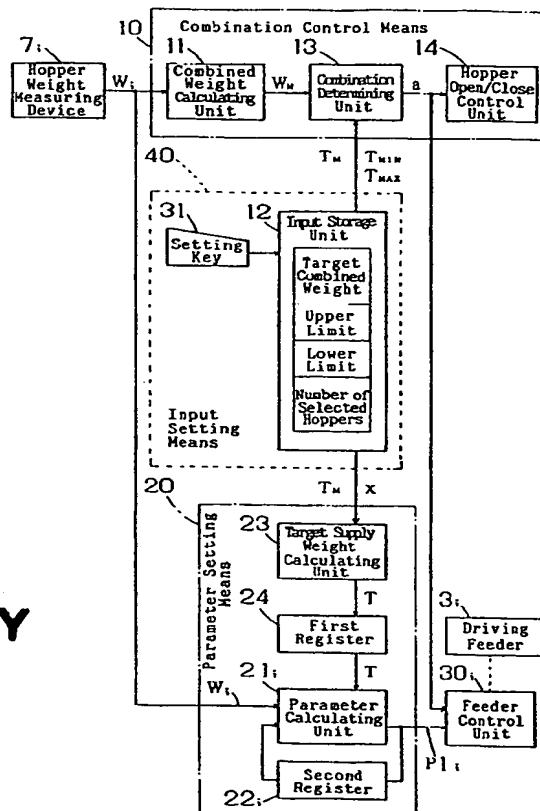

EP 0 640 814 A1

BEST AVAILABLE COPY

The present invention relates to a combinational weighing or counting method and an apparatus therefor which utilizes a plurality of weighing devices for weighing or counting a plurality of articles of varying weight such as, for example, snacks, candies, fruits or vegetables or small machine parts, and then to select an appropriate combination of the articles based on results of weight measurements or counts.

The combinational weighing apparatus is a machine so designed that the articles of varying weight such as snacks, candies, fruits or vegetables can be averaged or substantially matched in weight to a target combined weight. An example of this combinational weighing apparatus is well known and is disclosed in, for example, the Japanese Laid-open Patent Publication No. 63-30725 published in 1988, and will now be discussed with reference to Fig. 6.

Referring to Fig. 6, articles M to be weighed which have been transported by means of a transport conveyor 1 are dispensed through a dispensing feeder 2 into a plurality of vibratory feeders or driving feeders 3_1 to 3_n which subsequently loads fractions of the articles into respective weighing hoppers 6_1 to 6_n . A combination control means (not shown) selects some of the weighing hoppers 6_1 to 6_n to thereby select an appropriate combination of the weighing hoppers 6_1 to 6_n . In other words, based on the weights given by the respective weighing hoppers 6_1 to 6_n , the combination control means selects the appropriate combination of the weighing hoppers 6_1 to 6_n which would eventually provides a measured combined weight equal or generally equal to a target combined weight. The respective fractions of the articles M accommodated within the selected appropriate combination of the weighing hoppers 6_1 to 6_n are then discharged into a collecting and discharging chute 9.

According to the prior art, in order to accomplish the selection of the appropriate combination as precisely and as efficiently as possible, arrangement has hitherto been made that the amount of the articles M to be supplied into each of the weighing hoppers 6_1 to 6_n is equal or approximately equal to a target supply weight T (for example, the quotient of the target combined weight T_M divided by the number m of the weighing hoppers selected for the combination) to which the articles are supplied into the respective weighing hoppers 6_1 to 6_n . For this purpose, parameters for controlling a supply ability of each of the driving feeders 3_1 to 3_n (such as representative of the amplitude of vibration to which each driving feeder is vibrated and the vibrating time over which such driving feeder is vibrated) are controlled in the following manner.

A parameter setting means (not shown) determines, for each of the driving feeders 3_1 to 3_n , parameters for the current weighing cycle on the basis of the parameters for the previous weighing cycle and the amounts of the articles actually supplied into the

weighing hoppers 6_1 to 6_n during the previous weighing cycle. The driving feeders 3_1 to 3_n are vibrated according to the parameter so determined for the current weighing cycle that the amounts of the articles M corresponding to the target supply weight T can be supplied into the respective weighing hoppers 6_1 to 6_n .

The target supply weight T referred to above is determined in the following manner. Assuming that the number of the weighing hoppers 6_1 to 6_n is 10 (i.e., $n = 10$), arbitrarily chosen number m of the ten weighing hoppers will give the maximum number of calculated weights (combinational calculated weights) when the number m of the weighing hoppers is 5. Accordingly, the value of the target combined weight T_M divided by the arbitrarily chosen number, that is, 5, of the weighing hoppers is chosen as the target supply weight T. In this way, the combinational calculated weight W_M given by summing one or a number n of measured weights W_i together gives rise to a distribution shown by the phantom line in Fig. 1(b), showing the highest probability at a weight corresponding to the target combined weight T_M .

On the other hand, the weight of articles packed in, for example, a bag, that is, the combination selected weight W_S , is selected out from the combinational calculated weight W_M in the following manner. The combinational calculated weight W_M has an allowance ranging between a predetermined lower limit T_{MIN} and a predetermined upper limit T_{MAX} and, accordingly, the value within the allowance between the lower limit T_{MIN} and the upper limit T_{MAX} of the combinational calculated weight W_M is selected for the combination selected weight W_S . In other words, an area S2 hatched by the phantom lines in Fig. 1(b) is selected for the combination selected weight W_S .

As discussed hereinabove, since the combinational calculated weight W_M is so determined as to occur at the target combined weight T_M with the highest probability, the probability with which the combinational calculated weight W_M takes a value slightly smaller than the target combined weight T_M is comparable to the probability with which the combinational calculated weight W_M is slightly greater than the target combined weight T_M . However, since the target combined weight T_M is generally equal to the lower limit T_{MIN} , the combinational calculated weight W_M which is of a value slightly smaller than the target combined weight T_M which occurs with a high probability is not selected for the combination. Accordingly, the prior art method has a problem in that, even though weight measurement is carried out, cases often occur in which no combinational selection is carried out.

Where no combinational selection occurs even though the weight measurement has been carried out, it requires, for example, that all of the articles M within the respective weighing hoppers 6_1 to 6_n must

be discharged to the outside through the collecting and discharging chute 9 and, therefore, it brings about an additional problem in that the time required to complete each cycle of packing of the articles tends to be prolonged. It is to be noted that similar problems occur with the combinational counting apparatus.

The present invention has been devised with due regards paid to the foregoing problems and is intended to provide an improved combinational weighing or counting method and an improved combinational weighing or counting apparatus, in which there is less possibility that a combinational selection will not take place.

To this end, according one aspect of the present invention, a combinational weighing or counting method is featured in that the value at which the combinational calculated value obtained by the combination of measured values of the weighing hoppers occurs with a maximum probability is chosen to be greater than the target combined value T_M and within the allowance.

The principle of the above described method of the present invention will now be described with reference to Fig. 1(b). Since the combination calculated value occurs with a maximum probability at the value T_{M1} greater than the target combined value T_M , and since both the value slightly greater than the value T_{M1} and the value slightly smaller than the value T_{M1} are greater than the target combined value T_M which is the lower limit, a combinational selection of the both values is possible. Accordingly, as can readily be understood from Fig. 1(b), the probability with which the combination selection is possible according to the present invention (an area S1 hatched by the solid lines) is higher than the probability with which the combination selection is possible according to the prior art (the area S2 hatched by the phantom line).

Since, in the distribution shown by the solid line in Fig. 1(b), the probability of occurrence takes a maximum value at this value T_{M1} , the surface area of the hatched area S1 shown by the solid lines becomes greater than the surface area of the hatched area S2 shown by the phantom line and, therefore, effects of the present invention can be obtained and this is encompassed within the scope of the present invention.

Although the probability with which a value equal to the target combined value T_M occurs may be lowered as compared with that according to the prior art, it will not vary greatly from the prior art and, therefore, it does not matter.

According to another aspect of the combinational weighing or counting method of the present invention, a quotient of the combinational calculated values divided by a real number which is not an integer, is used as an average value of target supply values to which the articles are to be supplied to the respective weighing hoppers.

With this method, the probability of occurrence of

the value obtained by multiplying the average value of the target supply values times an arbitrarily chosen integer, that is, the combinational calculated value, is distributed as shown by the solid line in Fig. 1(b) and, for this reason, the probability of occurrence of the combinational calculated value will attain a maximum value at a value T_{M1} which is greater than the target combined value T_M . Accordingly, the probability of selection of the combination becomes high as is the case with the combinational weighing or counting method according to the first aspect of the present invention.

According to a third aspect of the present invention, the combinational weighing or counting apparatus is provided with an input setting means capable of being manipulated to input an integer and a real number, which is not an integer, as a number of the weighing hoppers selected to thereby to determine a target supply value, to which the articles are to be supplied to the individual weighing hopper, which is obtained by dividing the target combined value, and also with a target supply value calculating unit capable of dividing the target combined value by the number of the selected weighing hoppers which is the integer and the real number which is not an integer, thereby implementing the combinational weighing or counting method according to any one of the foregoing two aspect of the present invention.

According to a fourth aspect of the present invention, the combinational weighing or counting method is featured in that a parameter for controlling a supply ability of each of the driving feeders is determined on the basis of a quasi-target combined value T_{M1} which is greater than the target combined value T_M , but falling within the allowance of an lower limit T_{MIN} to an upper limit T_{MAX} as shown in Fig. 1(b).

With this combinational weighing or counting method according to the fourth aspect of the present invention, since the parameter for each of the driving feeders is determined on the basis of a quasi-target combined value T_{M1} , the probability of occurrence of the combinational calculated value attains a maximum value at the quasi-target combined value T_{M1} . On the other hand, since the quasi-target combined value T_{M1} is greater than the real target combined value T_M , the probability of selection of the combination becomes high as is the case with the combinational weighing or counting method according to the first aspect of the present invention, if a combinational calculated value close to the real target combined weight T_M is selected.

According to a fifth aspect of the present invention, the combinational weighing or counting apparatus is provided with a setting means for setting a quasi-target combined value in addition to the target combined value, and also with a parameter setting means for setting a parameter for each of the driving feeders on the basis of the quasi-target combined value,

thereby implementing the combinational weighing or counting method according to any one of the first and fourth aspects of the present invention.

Also, according to a sixth aspect of the present invention, the combinational weighing or counting apparatus is provided with an input setting means capable of being manipulated to input a target supply value to which the articles are to be supplied to each of the weighing hoppers, and also with a parameter setting means for setting a parameter for each of the driving feeders on the basis of the target supply value, thereby implementing the combinational weighing or counting method according to any one of the first and fourth aspects of the present invention.

This and other features of the present invention will become clear from the following description taken in conjunction with preferred embodiments thereof with reference to the accompanying drawings, in which like parts are designated by like reference numerals and in which:

Fig. 1(a) is a schematic diagram showing a concept of a combinational weighing apparatus according to a first preferred embodiment of the present invention;

Fig. 1(b) is a diagram showing a pattern of distribution of combinational calculated weights which would result from the combinational weighing method;

Fig. 2 is a schematic diagram showing the structure of the combinational weighing apparatus according to the first preferred embodiment of the present invention;

Fig. 3 is a schematic diagram showing the structure of the combinational weighing apparatus according to a second preferred embodiment of the present invention;

Fig. 4 is a schematic diagram showing the structure of the combinational weighing apparatus according to a third preferred embodiment of the present invention;

Fig. 5 is a schematic diagram showing a concept of a basic structure of the combinational weighing apparatus equipped with a booster; and

Fig. 6 is a schematic diagram showing one example of a general combinational weighing apparatus.

Hereinafter, some embodiments of the present invention will be described with reference to the accompanying drawings. Specifically, Figs. 1 and 2 illustrate a first preferred embodiment of the present invention.

Referring first to Fig. 1, a transport conveyor 1 is operable to fall articles M to be weighed onto a central portion of a generally flat conical dispensing feeder 2. A number n of vibratory feeders or driving feeders 3₁ to 3 _{n} are disposed around and substantially beneath an outer peripheral edge of the dispensing feeder 2. Each of these driving feeders 3₁ to 3 _{n} is, while driven

according to predetermined parameters, that is, while vibrated at a predetermined amplitude for a predetermined length of time, operable to feed the articles M to be weighed on the dispensing feeder 2 onto an equal number n of pooling hoppers 4₁ to 4 _{n} , each provided with a respective gate 5₁ to 5 _{n} . Weighing hoppers 6₁ to 6 _{n} are disposed immediately beneath the associated pooling hoppers 4₁ to 4 _{n} . Each of the weighing hoppers 6₁ to 6 _{n} is provided with a respective hopper weight measuring device 7₁ to 7 _{n} and a respective gate 8₁ to 8 _{n} . Positioned beneath the gates 8₁ to 8 _{n} are a relatively large-sized discharge chute 9.

Referring to Fig. 2, each of the hopper weight measuring devices 7₁ comprises, for example, a load cell and is operable to measure the weight of the article M within the corresponding weighing hopper 6₁ (Fig. 1) and also to output the measured weight W_i to a combination control means 10 and a parameter setting means 20. It is to be noted that, in the drawings, a suffix "i" affixed to some of the reference numerals is intended to mean that the element or signal designated by the relevant reference numeral to which the suffix is affixed is employed in a plural number n . It is also to be noted that both of the combination control means 10 and the parameter setting means 20 are implemented by the use of a microcomputer (CPU).

The combination control means 10 is operable to select an appropriate combination of the weighing hoppers 6₁ by combining some of the weights of the articles M measured respectively by the weighing hoppers 6₁ to 6 _{n} shown in Fig. 1. The combination control means 10 shown in Fig. 2 comprises a combined weight calculating unit 11, a target weight setting unit 11, a combination determining unit 13 and a hopper open/close control unit 14. The combined weight calculating unit 11 performs a summation of a combination of arbitrarily chosen m measured weights W_i out from the measured weights W_1 to W_n measured respectively by the hopper weight measuring devices 7₁ to 7 _{n} and then outputs the summed weight W_M , that is, the total weight of the number m of the measured weights W_i to the combination determining unit 13. This summation and the outputting of the summed weight W_M are carried out subject to all combinations.

An input setting means 40 includes a setting key 31 and an input storage unit 12. The input storage unit 12 stores the target combined weight T_M , the upper limit T_{MAX} , the lower limit T_{MIN} and the number x of hoppers selected, all inputted from the setting key 31. It is to be noted that it often occurs that the target combined weight T_M and the lower limit T_{MIN} are set to be of an equal value.

The combination determining unit 13 compares the summed weight W_M with the target combined weight T_M and also compares the combinational calculated weight W_M falling within the range from the lower limit T_{MIN} to the upper limit T_{MAX} (i.e., within the

allowance) with the target combined weight T_M fed from the input storage unit 12, to thereby select a combination in which the weight of the articles M to be packaged is equal to the target combined weight T_M or is of a value within the allowance ranging from the lower limit T_{MN} to the upper limit T_{MAX} . The combination determining unit 13 subsequently outputs a selection signal a to the hopper open/close control unit 14 and a feeder control unit 30.

The hopper open/close control unit 14 opens the gates 8_i of a selected number m of the weighing hoppers 6_i shown in Fig. 1. In this way, the articles M are discharged from the selected weighing hoppers 6_i , subsequently collected together in the collecting and discharge chute 9 and finally supplied onto a packaging machine 9A. Also, the hopper open/close control units 14 (Fig. 2) opens the gates 5_i of some of the pool hoppers 4_i which are associated with the emptied weighing hoppers 6_i , thereby allowing the articles M to be supplied from such pool hopper 4_i onto such weighing hoppers 6_i . On the other hand, the feeder drive control unit 30 is employed for each of the driving feeders 3_i and is operable to drive the driving feeders 3_i associated with the emptied pooling hoppers 4_i shown in Fig. 1 according to the predetermined parameter to deliver the articles M to the pooling hoppers 4_i .

As shown in Fig. 2, the parameter setting means 20 comprises a target supply weight calculating unit 23 for calculating the target supply weight T, a parameter calculating unit 21, and first and second registers 24 and 22. The target supply weight calculating unit 23 reads both of the target combined weight T_M and the number x of the hoppers to be selected from the input storage unit 12 and calculates the target supply weight T by dividing the target combined weight T_M by the number x of the selected hoppers. In the illustrated embodiment, since the target supply weight T is equal for all of the weighing hoppers 6_i , the average value of the target supply weights T is of a value equal to the target supply weight T.

The setting key 31 is capable of inputting the number x of the hoppers to be selected in terms of a real number (integer and a real number which is not an integer) including a decimal, whereas the input storage unit 12 is capable of storing the number x of the selected hoppers. The target supply weight calculating unit 23 is capable of dividing the target combined weight T_M by the number x of the hoppers to be selected which is represented by the real number (the integer and the real number which is not an integer) including the decimal.

The target supply weight T is stored in the first register 24 and is subsequently read out to the parameter calculating unit 21. The second register 22 is used to store the parameter which has been calculated by the parameter calculating unit 21 during the previous cycle and is adapted to receive a parameter

signal $p1_i$ from the parameter calculating unit 21.

The parameter calculating unit 21 is operable to determine, based on the measured weights W_i supplied from the hopper weight measuring devices 7_i , whether the amount W_i of the articles supplied into the hoppers 6_i (Fig. 1) is greater or smaller than the target supply weight T. If the amount W_i of the articles supplied into the hoppers 6_i is found to be greater than the target supply weight T, the parameter calculating unit 21 subtracts a single unit from the parameter supplied from the second register 22, and then outputs a parameter signal $p1_i$ representing this subtracted value. On the other hand, if the amount W_i of the articles supplied into the hoppers 6_i is found to be smaller than the target supply weight T, the parameter calculating unit 21 adds a single unit to the parameter supplied from the second register 22, and then outputs a parameter signal $p1_i$ representing this summed value. Again, if the amount W_i of the articles supplied into the hoppers 6_i is found to be equal to the target supply weight T, the parameter calculating unit 21 pass therethrough and outputs the parameter supplied from the second register 22, as a parameter signal $p1_i$. Although not shown, both of the parameter calculating unit 21 and the second register 22 are employed for each of the amplitude and the vibrating time of the driving feeders 3_i shown in Fig. 1.

A feeder drive control unit 30 is operable in response to the parameter signal $p1_i$ from the parameter calculating unit 21 to drive the driving feeders 3_i according to the preset parameter. Accordingly, each of the weighing hoppers 6_i is supplied with the articles M in a quantity approximating to the target supply weight T.

A basic operation of the combinational weighing apparatus will now be described in detail.

The articles M to be weighed are transported by the transport conveyor 1, shown in Fig. 1, onto the dispensing feeders 2 and are, after having passed through the driving feeders 3_i , the pooling hoppers 4_i and the weighing hoppers 6_i , eventually discharged through the collecting and discharging chute 9 and into the packaging machine 9A which serves to package the articles M into, for example, a bag. At this time, the combination control means 10 selects an appropriate combination of the number m of the weighing hoppers 6_i (Fig. 1) as hereinbefore described. On the other hand, the hopper open/close control unit 14 opens the gates 5_i of some of the pooling hoppers 4_i operatively associated with the weighing hoppers 6_i from which the articles M have been discharged, so that the articles M can be supplied from the pooling hoppers 4_i onto the empty weighing hoppers 6_i . Also, the driving feeders 3_i operatively associated with the emptied pooling hoppers 4_i are driven to supply the articles M to the empty pooling hoppers 4_i .

The number x of the hoppers to be selected re-

ferred to above is set to be, for example, 4.8 where the target combined weight T_M is set to be 100 gram, the upper limit T_{MAX} is set to be 110 gram and the number of the weighing hoppers 6_i is 10 (a 10-head machine). The reason therefor will now be discussed.

As hereinbefore discussed in connection with the prior art, where the number of the weighing hoppers 6_i is ten, the number of the combinational calculated weights W_M in which arbitrarily chosen number m of the weighing hoppers are selected will attain a maximum value when the arbitrarily chosen number m is 5. Therefore, the number of the weighing hoppers to be selected may be considered to be 5.

Since if the number x of the weighing hoppers to be selected is assumed to be 5, the target supply weight T shown in Fig. 2 becomes equal to the target combined weight T_M divided by 5, i.e., $T = T_M/5$, there is the highest probability that the combinational calculated weight W_M in which the respective weights measured by the five weighing hoppers 6_i are combined is of a value equal to the target combined weight T_M and the pattern of distribution of probabilities of occurrence of the combinational calculated weights W_M is such as shown by the phantom line in Fig. 1(b). For this reason, the probability of occurrence of a value slightly smaller than the target combined weight T_M , that is, the lower limit T_{MIN} becomes high as well and, since the combinational calculated weight W_M which is smaller than lower limit T_{MIN} cannot be selected, there is a possibility that no combinational selection takes place. In other word, if the number x of the selected hoppers is 5, the number of the weighing hoppers 6_i actually selected will become greater than 5.

On the other hand, if the number x of the weighing hoppers to be selected is chosen to be 4.8, the target combined weight T_M divided by 4.8, i.e., $100/4.8$, results in the target supply weight T of 20.8 gram. Accordingly, the value T_{M1} at which the probability of occurrence of the combinational calculated weight W_M in which the five measured weights W_i are combined attains a maximum (highest) value is given by a multiplication of the target supply weight T by 5, that is, $20.8 \times 5 = 104$ gram, which is greater than the target combined weight T_M and falls within the allowance of the lower limit T_{MIN} (100 gram) to the upper limit T_{MAX} (110 gram). In this case, a pattern of distribution of the probability of occurrence of the combinational calculated weight W_M is such as shown by the solid line in Fig. 1(b) and the probability of occurrence of the combination selected weight W_S shown by the area S1 hatched by the solid line in Fig. 1(b) is greater than the probability of occurrence thereof shown by the area S2 hatched by the phantom line in Fig. 1(b) according to the prior art and, consequently, the cases in which no combinational selection takes place are minimized. Thus, by selecting the number x of the selected weighing hoppers to be 4.8, that is, by choosing the

value equal to the target combined weight T_M divided by a real number, which is not an integer, for the target supply weight T (for example, 20.8 gram) to which the articles are to be supplied into the weighing hoppers 6_i , there is a high tendency that the number of the weighing hoppers 6_i actually selected is 5.

In the meantime, in the prior art combinational weighing apparatus disclosed in the Japanese Patent Publication No. 62-30367, the target supply weight for each of the weighing hoppers is chosen to be $(T - \Delta T)$, T and $(T + \Delta T)$. In this prior art combinational weighing apparatus, although the weighing hopper for which the target supply weight is chosen to be T is of a value equal to the target combined weight T_M divided by an integer, considering only the weighing hoppers for which the target supply weight is chosen to be $(T - \Delta T)$ or $(T + \Delta T)$, the value equal to the target combined weight T_M divided by a real number including a decimal is set for the target supply weight. However, according to this prior art, the average value of the target supply weights is T and, accordingly, it does not bring about such function and effects as accomplished by the present invention. Accordingly, whether or not it is included within the scope of the present invention is to be determined in consideration of whether or not the average value T of the target supply weights T_i for all of the weighing hoppers is equal to the target combined weight T_M divided by a real number which is not an integer, not in consideration of whether or not the individual target supply weight T_i is equal to the target combined weight T_M divided by a real number which is not an integer.

According to the first preferred embodiment of the present invention discussed hereinbefore, the value equal to the target combined weight T_M divided by a real number which is not an integer is chosen to be the target supply weight T to which the articles are to be supplied into the weighing hoppers 6_i , so that the value T_{M1} at which the probability of occurrence of the combinational calculated weight W_M attains a maximum value is greater than the target combined weight T_M and falls within the allowance ranging from the lower limit T_{MIN} to the upper limit T_{MAX} . However, as will be described subsequently, by setting a quasi-target combined weight T_{M1} which is greater than the target combined weight T_M and falls within the allowance from the lower limit T_{MIN} to the upper limit T_{MAX} and then by setting the parameter for each driving feeders 3_i based on the quasi-target combined weight T_{M1} , the combinational calculated weight W_M at which the probability of occurrence attains a maximum value may be chosen to be greater than the target combined weight T_M while falling within the allowance from the lower limit T_{MIN} to the upper limit T_{MAX} .

Fig. 3 illustrates a second preferred embodiment of the present invention. Referring to Fig. 3, the input storage unit 12 stores, in addition to the target com-

bined weight T_M , the quasi-target combined weight T_{M1} which has been inputted thereto from the setting key 31. Both of the quasi-target combined weight T_{M1} and the number x of the hoppers to be selected are outputted to the target supply weight calculating unit 23. The target supply weight calculating unit 23 determines the target supply weight T by dividing the quasi-target combined weight T_{M1} by the number x of the hoppers to be selected, which target supply weight T is subsequently stored in the first register 24. Accordingly, the parameter calculating unit 21_i of the parameter setting means 20 determines the parameter for each driving feeder 3_i on the basis of the quasi-target combined weight T_{M1} .

As shown in Fig. 1(b), the quasi-target combined weight T_{M1} is set to a value greater than the target combined weight T_M and falling within the allowance from the lower limit T_{MIN} to the upper limit T_{MAX} . By way of example, if the target combined weight T_M is 100 gram and the upper limit T_{MAX} is 110 gram, the quasi-target combined weight T_{M1} is set to be 104 gram. Where the number of the weighing hoppers 6_i is 10, the number x of the hoppers to be selected is set to be 5. Accordingly, even in this second preferred embodiment of the present invention, the target supply weight T is chosen to be 20.8 gram as is the case with the first preferred embodiment of the present invention and the pattern of distribution of the probability of occurrence of the combinational calculated weight W_M represents such as shown in Fig. 1(b).

On the other hand, since in selecting the weighing hoppers 6_i the combination determining unit 13 selects a combination of the weighing hoppers 6_i on the basis of the target combined weight T_M , not the quasi-target combined weight T_{M1} shown in Fig. 3, the combination selected weight W_s will take a value close to the target combined weight T_M . It is to be noted that, in the practice of the second preferred embodiment of the present invention, the number x of the hoppers to be selected may be inputted in the form of an integer as is the case with the prior art. Since other structural features than those described above are similar to those described in connection with the first preferred embodiment of the present invention, parts shown in Fig. 3 which are similar to parts shown in Fig. 2 are designated by like reference numerals employed in Fig. 2 and the details thereof are not reiterated for the sake of brevity.

It is to be noted that in the practice of any one of the first and second preferred embodiments of the present invention, the target supply weight calculating unit 23 performs the following calculations to determine the target supply weight T .

$$T = T_M/x \quad (x \text{ is a real number which is not an integer.}) \quad (1)$$

$$T = T_{M1}/x \quad (x \text{ is a natural number and } T_M < T_{M1} < T_{MAX}) \quad (2)$$

However, in the practice of the present invention,

the target supply weight calculating unit 23 may be designed to perform the following calculations (3) to (6) to give rise to the effects of the present invention and, therefore, this alternative should be included within the scope of the present invention.

$$T = (T_{MIN} + T_{MAX})/(2 \cdot x) \quad (x \text{ is a natural number.}) \quad (3)$$

$$T = (T_M/x)\alpha \quad (x \text{ is a natural number and } \alpha \text{ is a number smaller than 1, for example, 0.95}) \quad (4)$$

$$T = (T_M/x)\beta \quad (x \text{ is a natural number and } \beta \text{ is a number greater than 1, for example, 1.05}) \quad (5)$$

$$T = (T_M/x) + \Delta\gamma \quad (x \text{ is a natural number and } \Delta\gamma \text{ is a value such as about 1 gram.}) \quad (6)$$

Where the target supply weight T is to be determined according to the foregoing equations (3) to (6), the target supply weight calculating unit 23 shown in Fig. 2 should be modified.

A third preferred embodiment of the present invention is shown in Fig. 4, reference to which will now be made.

Referring now to Fig. 4, an input setting means 40 is capable of inputting the target supply weight T to which the articles are to be supplied into the weighing hoppers 6_i. In other words, the target supply weight T is inputted from the setting key 31 and is subsequently stored in the input storage unit 12. This target supply weight T is then transferred to the first register 24 which outputs it to the parameter calculating unit 21_i. Accordingly, the parameter calculating unit 21_i of the parameter setting means 20 is capable of setting the parameter for each driving feeder 3_i on the basis of the target supply weight T . By way of example, if the target combined weight T_M is 100 gram, the upper limit T_{MAX} is 110 gram and the number of the weighing hoppers 6_i is 10, the target supply weight T is set to be 20.8 gram. Accordingly, even with the third preferred embodiment of the present invention, similar effects to those given by any one of the first and second preferred embodiment of the present invention can be obtained. Since other structural features than those described above are similar to those described in connection with the first preferred embodiment of the present invention, parts shown in Fig. 4 which are similar to parts shown in Fig. 2 are designated by like reference numerals employed in Fig. 2 and the details thereof are not reiterated for the sake of brevity.

In describing any one of the first to third preferred embodiments of the present invention, the combinational weighing apparatus (the 10-head machine) has been described as having ten weighing hoppers 6_i. However, the present invention is not always limited thereto and is equally applicable to any other head number machine such as a 14-head combinational weighing apparatus in which the number of the weighing hoppers 6_i employed is 14.

In the 14-head combinational weighing apparatus, the combination control means 10 shown in Fig. 1 selects m weighing hoppers 6_i out from the 14

weighing hoppers 6_i and again selects k weighing hoppers 6_i out from the remaining weighing hoppers 6_i , that is, $(14 - m)$ weighing hoppers 6_i . Accordingly, after the selection, the weighing hoppers 6_i are selected from the number of the weighing hoppers 6_i which is smaller than 14. By way of example, assuming that the five weighing hoppers 6_i are selected out from the remaining ten weighing hoppers 6_i which are smaller in number than the total number of the weighing hoppers 6_i employed, the number of the still remaining weighing hoppers 6_i is 5 and, therefore, even though the number of the weighing hoppers 6_i to which the articles are newly supplied from the associated driving feeders 3_i , which is 4, is added, selection must be made from the nine weighing hoppers 6_i and the accuracy of selection of the combination will therefore be lowered. Accordingly, in the case of the 14-head combinational weighing apparatus or the like apparatus wherein selection cannot be made from all of the weighing hoppers 6_i , it is important to render the number of the weighing hoppers actually selected to be a predetermined value.

However, in the weighing apparatus of the present invention, it is possible to render the number of the weighing hoppers 6_i actually selected to be close to a predetermined value such as, for example, 4. In other words, since the number of the weighing hoppers selected can be controlled, the accuracy of selection of the combination increases.

In addition, the present invention can be equally applicable to the combinational weighing apparatus of a type equipped with an auxiliary hopper system as shown in Fig. 5. In the system of Fig. 5, each of the weighing hoppers 6_1 to 6_n is equipped with two gates which are selectively opened to supply the articles M into an associated auxiliary hopper $4A_i$ or into the collecting and discharging chute 9. Accordingly, the number of the hoppers which can be used for selection of the combination is twice the number of the weighing hoppers 6_1 to 6_n .

Also, in describing any one of the foregoing first to third preferred embodiments of the present invention, reference has been made to the combinational weighing apparatus operable to weigh the articles M to the target combined weight T_M . However, the present invention is also applicable to a combinational counting apparatus operable to count the articles, such as screws or like machine parts, to a target combined count. In such combinational counting apparatus, the number of the articles M held in the weighing hoppers 6_i is detected by measuring the weight of the articles M therein, and an appropriate combination of the weighing hoppers 6_i is chosen so as to obtain a combined number of the articles M equal to the target combined count or within the allowance.

As hereinbefore fully described, according to the present invention, since the probability of occurrence of the combined calculated weight is maximized at the

value greater than the target combined value within the allowance, the probability of selection of the combination is high as compared with that according to the prior art.

Claims

1. A combitional weighing or counting method which comprises the steps of:
 - supplying from an upstream side articles to a plurality of weighing hoppers by driving a corresponding number of driving feeders;
 - selecting as a combination selected value, one of combinational calculated values which are obtained by combining measured values of the articles supplied into the weighing hoppers, which one is of a value equal to a target combined value or within an allowance thereof; and
 - setting the value, at which a probability of occurrence of the combinational calculated value is maximum, to be greater than the target combined value, but falling within the allowance.
2. A combinational weighing or counting method which comprises the steps of:
 - supplying from an upstream side articles to a plurality of weighing hoppers by driving a corresponding number of driving feeders;
 - selecting as a combination selected value, one of combinational calculated values which are obtained by combining measured values of the articles supplied into the weighing hoppers, which one is of a value equal to a target combined value or within an allowance thereof; and
 - setting a quotient of the combinational calculated values divided by a real number which is not an integer, to be an average value of target supply values to which the articles are to be supplied to the respective weighing hoppers.
3. The combinational weighing or counting method as claimed in Claim 2, wherein the real number which is not an integer is a value slightly smaller than the number of the weighing hoppers which provides a greatest number of combinations.
4. A combinational weighing or counting apparatus which comprises:
 - a plurality of weighing hoppers;
 - a plurality of driving feeders for supplying articles from an upstream side towards the corresponding weighing hoppers when the driving feeders are driven;
 - means for selecting, as a combination selected value, one of combinational calculated values which are obtained by combining measured values of the articles supplied into the weighing

hoppers, which one is of a value equal to a target combined value or within an allowance thereof;

an input setting means capable of being manipulated to input an integer and a real number, which is not an integer, as a number of the weighing hoppers to be selected for determining a target supply value, to which the articles are to be supplied to the individual weighing hopper, which is obtained by dividing the target combined value; and

a target supply value calculating unit for obtaining said target value by dividing the target combined value by the number of the selected weighing hoppers which is the integer and the real number which is not an integer.

5. The combinational weighing or counting apparatus as claimed in Claim 4, wherein the real number which is not an integer is a value slightly smaller than the number of the weighing hoppers which provides a greatest number of combinations.

6. A combinational weighing or counting method which comprises the steps of:

supplying from an upstream side articles to a plurality of weighing hoppers by driving a corresponding number of driving feeders;

selecting as a combination selected value, one of combinational calculated values which are obtained by combining measured values of the articles supplied into the weighing hoppers, which one is of a value equal to a target combined value or within an allowance thereof; and

setting a parameter for controlling a supply ability of each of the driving feeders on the basis of a quasi-target combined value which is greater than the target combined value, but falling within the allowance.

7. A combinational weighing or counting apparatus which comprises:

a plurality of weighing hoppers;

a plurality of driving feeders for supplying articles from an upstream side towards the corresponding weighing hoppers when the driving feeders are driven;

means for selecting, as a combination selected value, one of combinational calculated values which are obtained by combining measured values of the articles supplied into the weighing hoppers, which one is of a value equal to a target combined value or within an allowance thereof;

a setting means for setting a quasi-target combined value in addition to the target combined value; and

a parameter setting means for setting a parameter for controlling a supply ability of each

of the driving feeders on the basis of the quasi-target combined value.

8. A combinational weighing or counting apparatus which comprises:

a plurality of weighing hoppers;

a plurality of driving feeders for supplying articles from an upstream side towards the corresponding weighing hoppers when the driving feeders are driven;

means for selecting, as a combination selected value, one of combinational calculated values which are obtained by combining measured values of the articles supplied into the weighing hoppers, which one is of a value equal to a target combined value or within an allowance thereof;

an input setting means capable of being manipulated to input a target supply value to which the articles are to be supplied to each of the weighing hoppers; and

a parameter setting means for setting a parameter for controlling a supply ability of each of the driving feeders on the basis of the target supply value.

Fig.1(a)

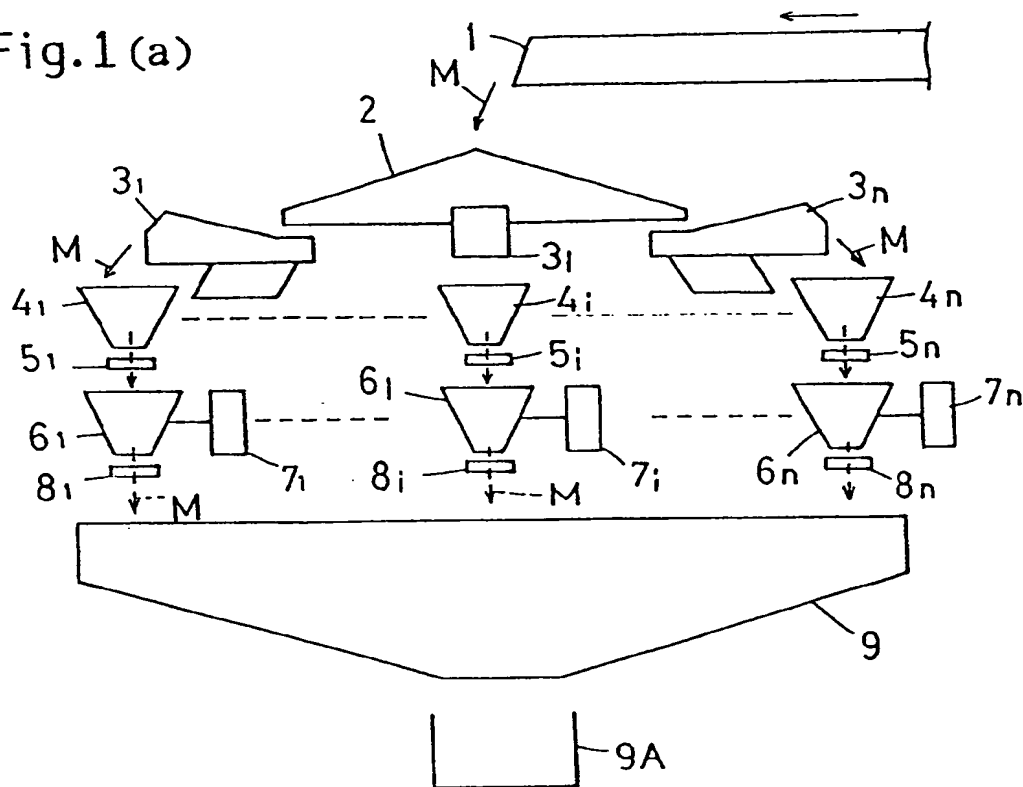


Fig.1(b)

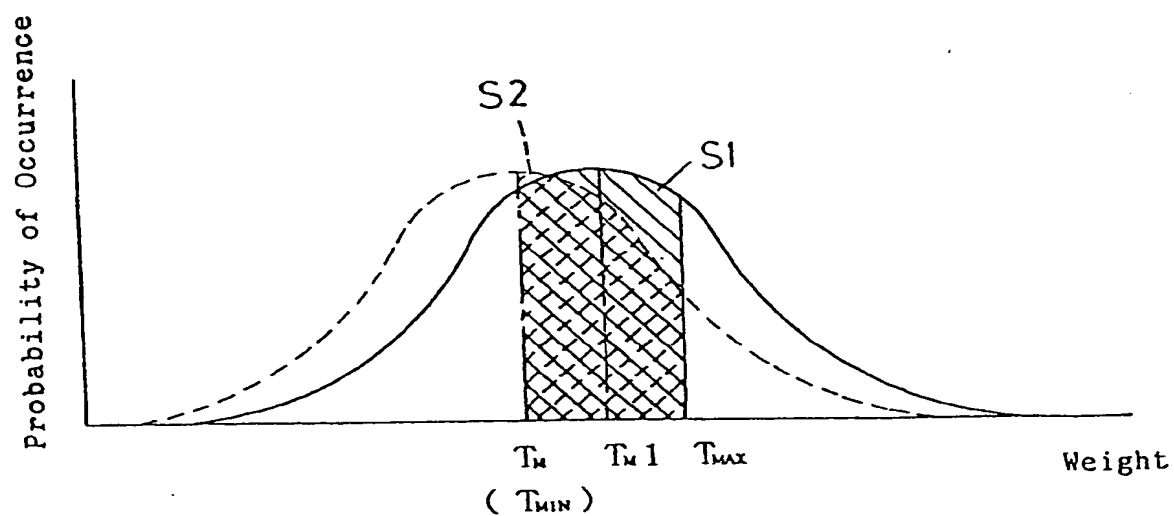


Fig.2

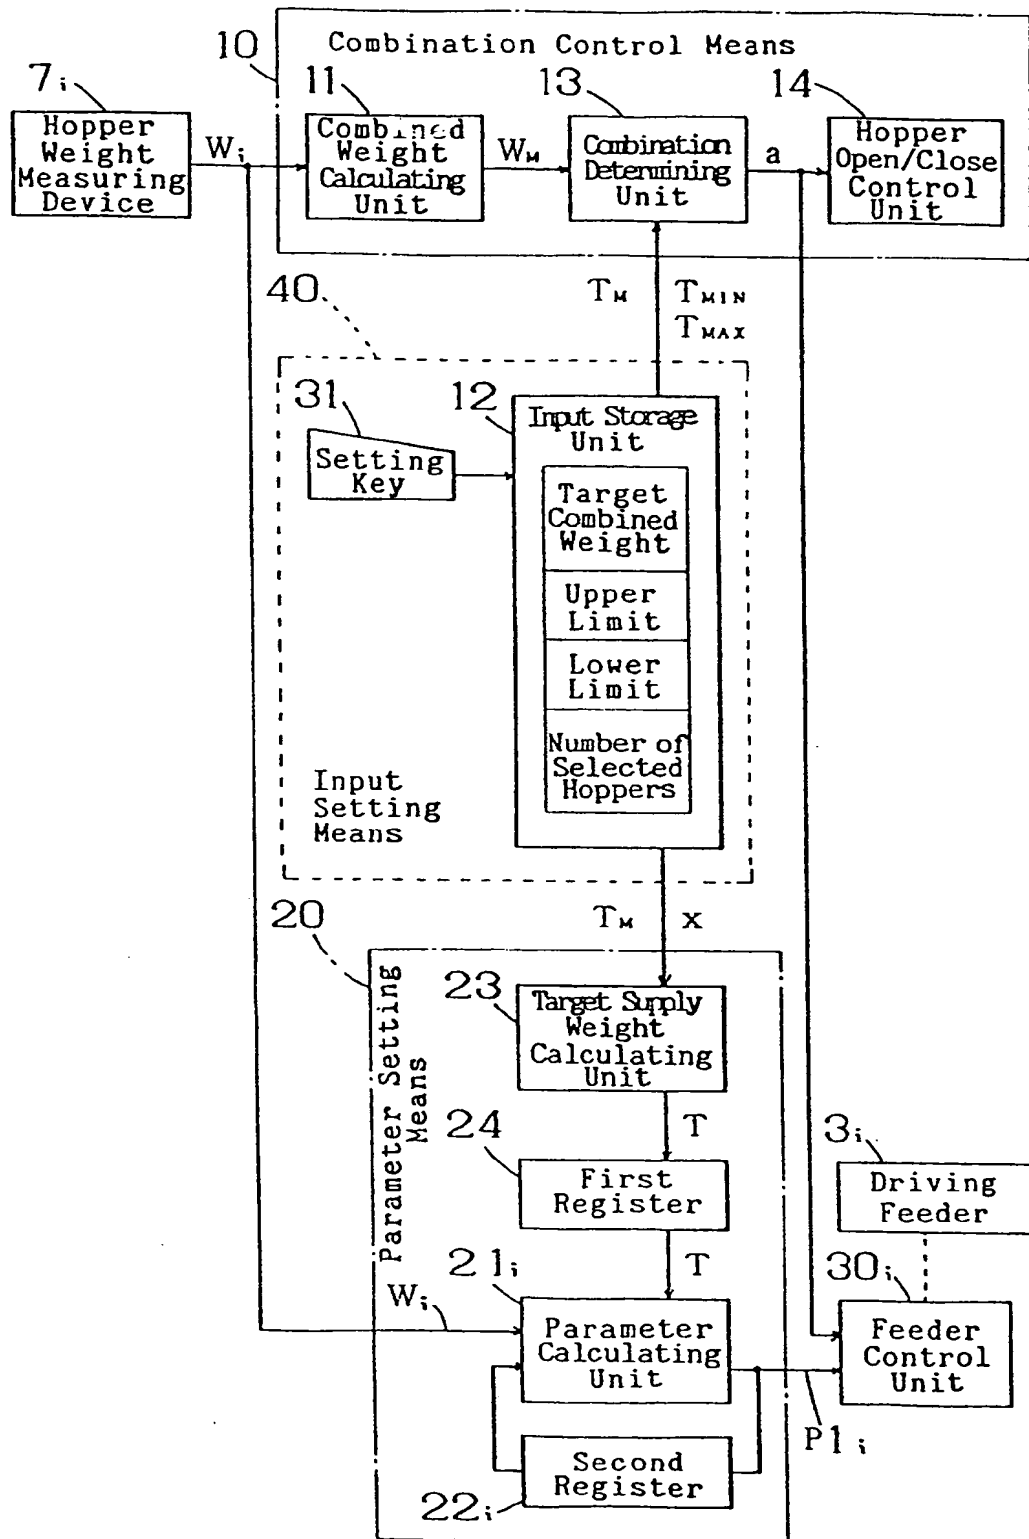


Fig.3

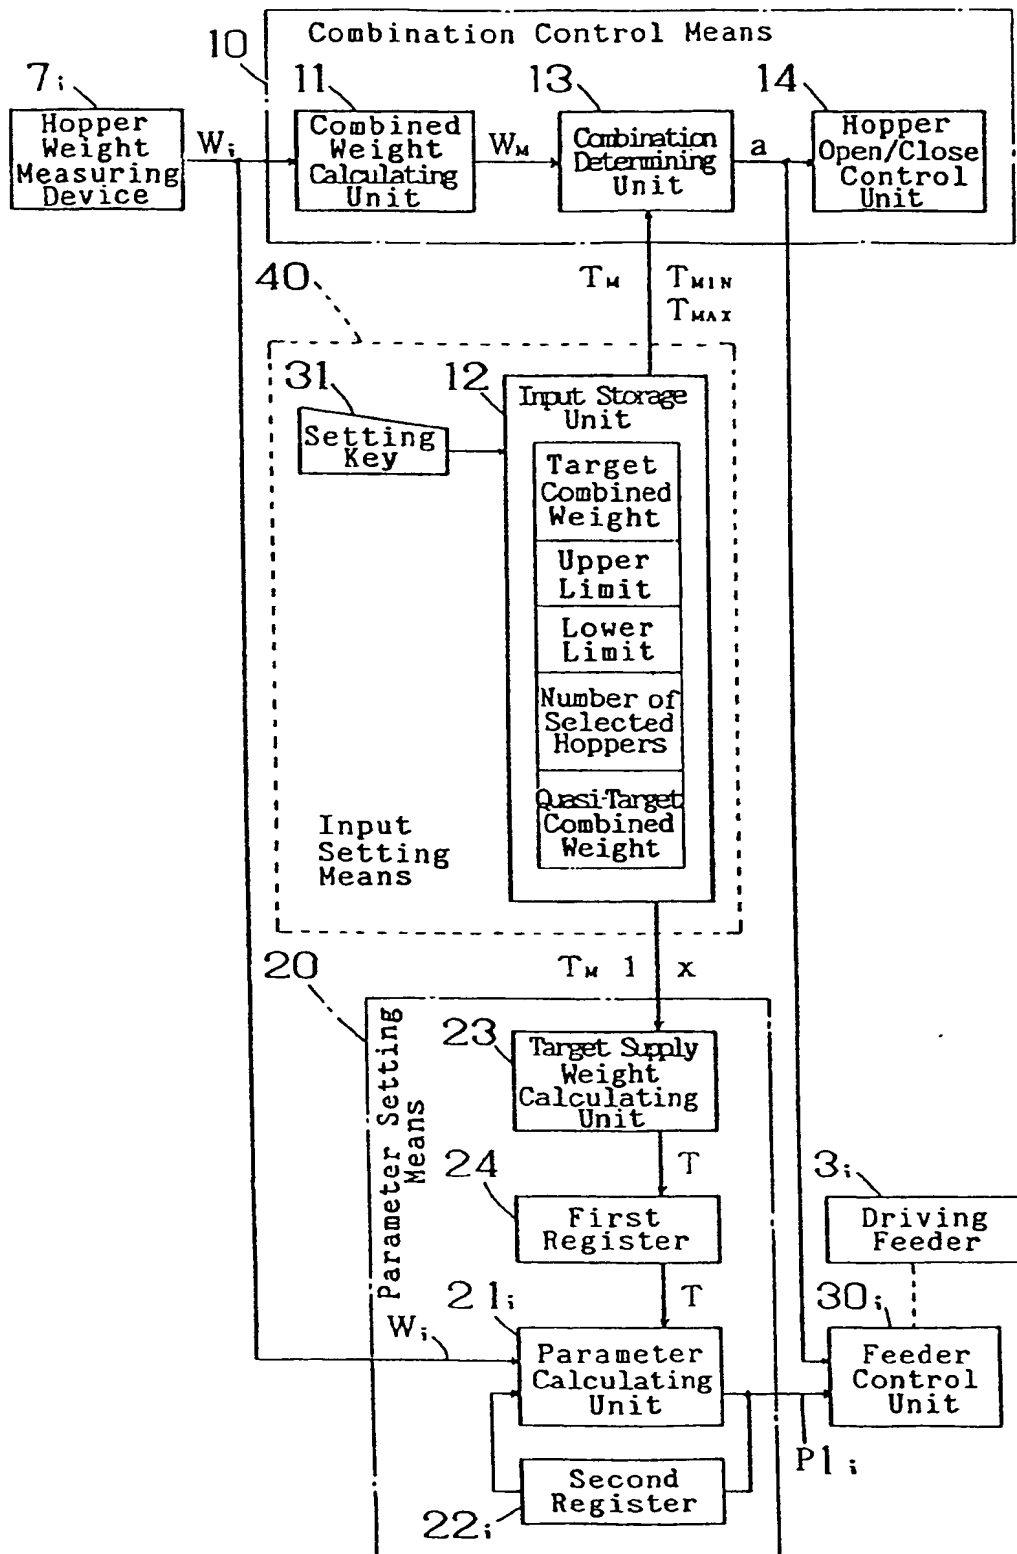


Fig.4

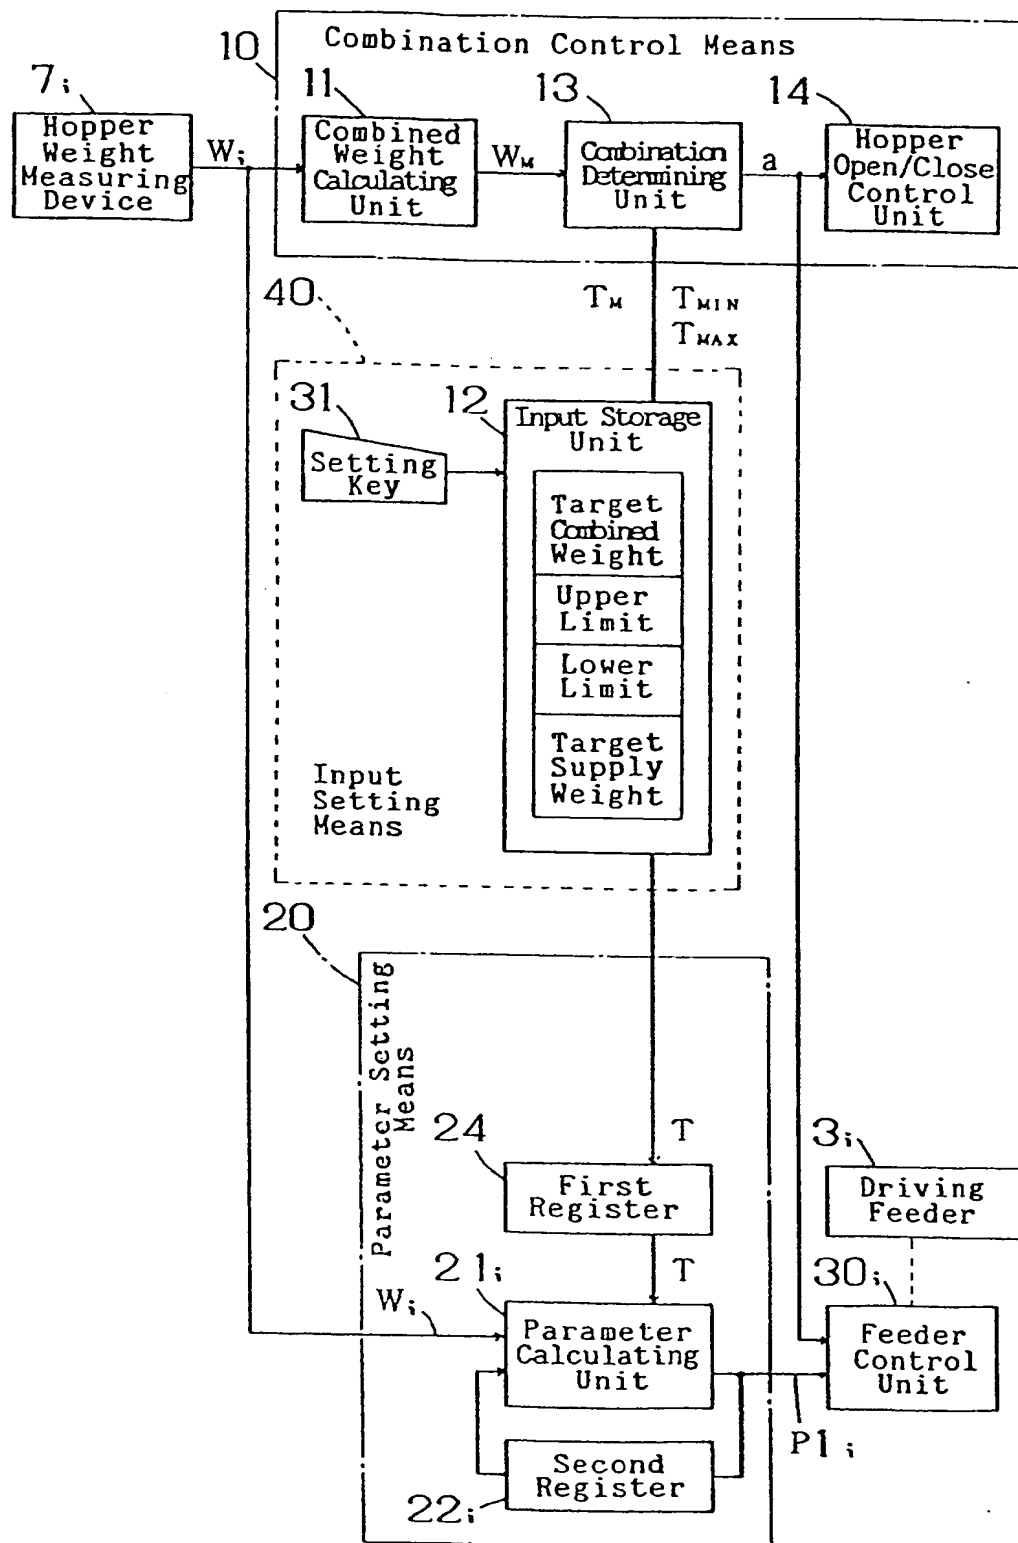


Fig.5


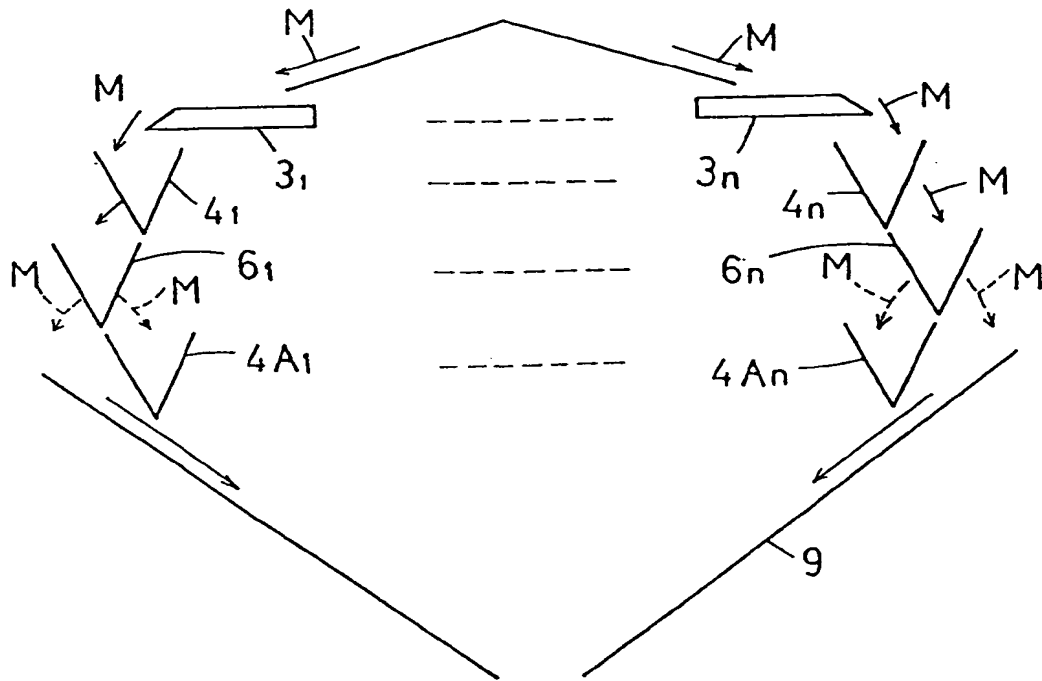


Fig.6



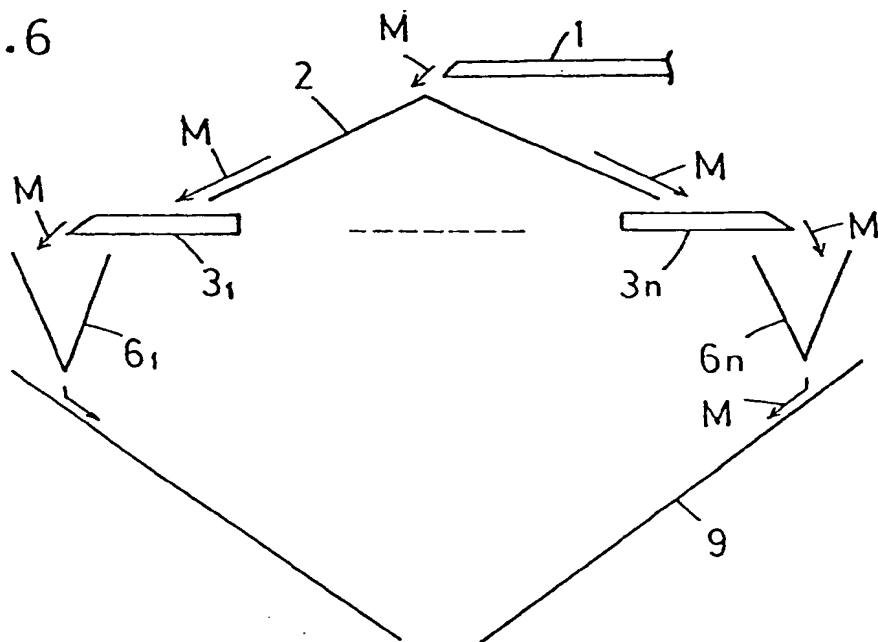

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 94 30 6202

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP-A-0 298 736 (YAMATO SCALE COMPANY LIMITED) * page 2, line 1 - line 2 * * page 2, line 8 - line 16 * * page 2, line 40 - line 44 * ---	8	G01G19/393 G01G19/42
A	GB-A-2 095 934 (K.K. ISHIDA KOKI SEISAKUSHO) * abstract * * page 1, line 80 - line 87 * ---	1,4,6,7	
A	US-A-4 828 054 (OREN A. MOSHER) * abstract * ---	1,4,6,7	
A	EP-A-0 319 225 (KLIKLOK CORPORATION) * abstract * * column 3, line 37 - line 44 * ---	1,4,6,7	
A	EP-A-0 097 531 (K.K. ISHIDA KOKI SEISAKUSHO) * abstract * -----	1,4,6,7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			G01G
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 16 November 1994	Examiner Ganci, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (01.92) (P04C01)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.